


AVAILABLE COLORS

LC ROLL OVER UNIBOOT CONNECTOR

THE SIMPLEST, FASTEST AND SAFEST POLARITY REVERSAL METHOD

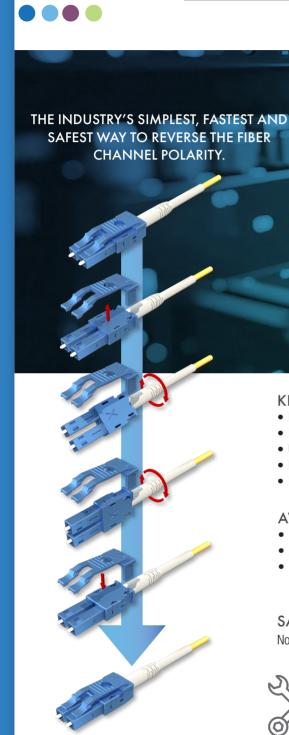

KEY FEATURES

- Polarity reversal without requiring a jig
- Insertion loss (typical); 0.2dB or less
- UL94V-0 flammability grade
- RoHS and REACH compliant
- IEC61754-20, TIA/EIA 604-10A, GR-326-CORE compliant

AVAILABLE OPTIONS

- SM and MM types available
- Available for 2.0mm, 3.0mm and 5.0mm cables type
- Standard boot and flex angle boot types available

SAFEST POLARITY REVERSAL METHOD

No fiber is exposed during the polarity reversal process.



No Tools Required



No Delicate Handwork Required



APPLICATIONS

- Data Centers
- Gigabit Ethernet
- Active Device Termination
- Private Networks
- Telecommunication Networks





PIONEERING CUSTOM FIBER OPTIC SOLUTIONS FOR YOUR UNIQUE NEEDS

