




## 800G OSFP TO 800G OSFP DAC

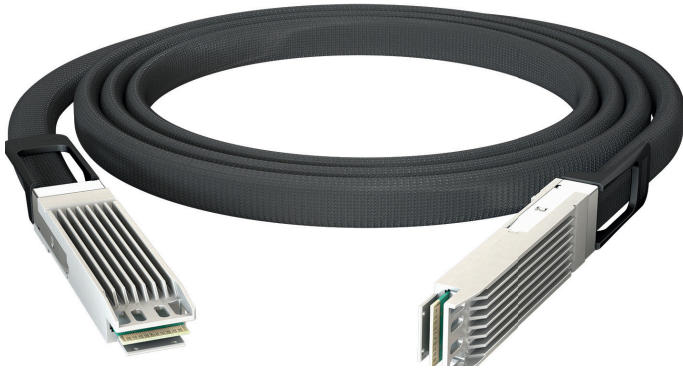

### KEY FEATURES

- Compatible with 800G Ethernet (IEEE 802.3ck)
- Supports aggregate data rates of 800Gbps(PAM4)
- Optimized construction to minimize insertion loss and crosstalk
- Pull-to-release slide latch design
- Straight and break out assembly configurations available
- 30AWG through 26AWG cable, uses 16 pairs of cables for overall flexibility
- **Temperature Range: 0°C - 70°C**
- 3.3V Power Supply
- **Made in Thailand**
- RoHS Compliance

SANWA P/N	Length	AWG
800 ODAC-005	0.5m	30AWG
800 ODAC-015	1.5m	28AWG
800 ODAC-025	2.5m	26AWG

### APPLICATIONS

- Switches, Servers and Storage Devices
- Data Center Networks
- High Performance Computing
- Telecommunication

## 800G QSFP-DD TO 800G QSFP-DD DAC



### KEY FEATURES

- Compatible with 800G Ethernet (IEEE 802.3ck)
- Supports aggregate data rates of 800Gbps(PAM4)
- Optimized construction to minimize insertion loss and crosstalk
- Pull-to-release slide latch design
- Straight and break out assembly configurations available
- **Temperature Range: 0°C - 70°C**
- 3.3V Power Supply
- **Made in Thailand**
- RoHS Compliance

SANWA P/N	Length	AWG
800 QDDAC-005	0.5m	30AWG
800 QDDAC-010	1.0m	28AWG

### APPLICATIONS

- Switches, Servers and Storage Devices
- Data Center Networks
- High Performance Computing
- Telecommunication